

製品紹介

アイソレータ、サーキュレータ




アスニクス株式会社

<https://www.asnics.com/index.html>

[本社] TEL : 045-470-6515 FAX : 045-470-6518
[大阪営業所] TEL : 06-6195-2111 FAX : 06-6195-2155

Φ7mmアイソレータ/サーキュレータ

PN	Frequency (MHz)	Direction	Insertion Loss (dB)	Isolation (dB)	Return Loss (dB)	Power FWD/REV/PEAK (W)
DP0017C	2515-2685	CW	0.33 Max.	20	20	30/30/150
DP0018C	2515-2685	CCW	0.33 Max.	20	20	30/30/150
DP0019C	3400-3700	CW	0.35 Max.	22	22	30/30/150
DP0020C	3400-3700	CCW	0.35 Max.	22	22	30/30/150
DP0119C	3300-3800	CW	0.5 Max.	16	16	30/30/150
DP0120C	3300-3800	CCW	0.5 Max.	16	16	30/30/150
DP0121C	4400-5000	CW	0.5 Max.	16	16	30/30/150
DP0122C	4400-5000	CCW	0.5 Max.	16	16	30/30/150
DP0201C	3400-3600	CW	0.3 Max.	20	22	30/30/150
DP0202C	3400-3600	CCW	0.3 Max.	20	22	30/30/150
DP0205C	2496-2690	CW	0.4 Max.	20	22	30/30/150
DP0206C	2496-2690	CCW	0.4 Max.	20	22	30/30/150
DP0243C	2496-2690	CW	0.3 Max.	20	22	30/30/150
DP0241C	3400-3600	CW	0.25 Max.	20	22	30/30/150
DP0289C	3420-3800	CW	0.3 Max.	20	21	30/30/150
DP0277C	3400-3700	CW	0.28 Max.	20	22	30/30/150

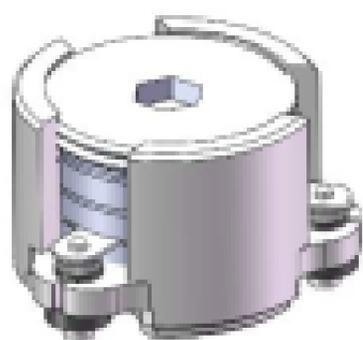

Ø7mm



アスニクス株式会社

<https://www.asnics.com/index.html>

[本社] TEL : 045-470-6515 FAX : 045-470-6518
[大阪営業所] TEL : 06-6195-2111 FAX : 06-6195-2155

4mm~7mmアイソレータ/サーキュレータ

Part Number	Frequency	Center frequency	Insertion loss	Isolation	Return loss	Handling power	Reflection power	Size[W*L*T]	
	(MHz)	(MHz)	(dB) Max.	(dB) Min	(dB) Max.	(W) Max	(W) Max	W*L[mm] ±0.3	T[mm] ±0.2
DP-IL0520(A&B)634	617-652	634.5	1.30	9	11	5	2	5*5	2
DP-IL0520(A&B)748	729-768	748.5	1.30	9	11	5	2	5*5	2
DP-IL0520(A&B)780	758-803	780.5	1.20	11	11	5	2	5*5	2
DP-IL0520(A&B)806	791-821	806	1.10	11	11	5	2	5*5	2
DP-IL0520(A&B)873	852-894	873	1.10	10	11	5	2	5*5	2
DP-IL0520(A&B)942	925-960	942.5	0.90	13	13	5	2	5*5	2
DP-IL0520(A&B)1842	1805-1880	1842.5	0.80	14	14	5	2	5*5	2
DP-IL0520(A&B)1900	1880-1920	1900	0.65	14	14	5	2	5*5	2
DP-IL0520(A&B)1960	1930-1990	1960	0.65	14	14	5	2	5*5	2
DP-IL0520(A&B)1962	1930-1995	1962.5	0.70	14	14	5	2	5*5	2
DP-IL0520(A&B)2140	2110-2170	2140	0.65	14	14	5	2	5*5	2
DP-IL0520(A&B)2155	2110-2200	2155	0.70	14	14	5	2	5*5	2
DP-IL0520(A&B)2350	2300-2400	2350	0.70	14	14	5	2	5*5	2
DP-IL0520(A&B)2593	2496-2690	2593	0.80	12	12	5	2	5*5	2
DP-IL0520(A&B)2655	2620-2690	2655	0.65	15	14	5	2	5*5	2
DP-IL0520(A&B)3450	3300~3600	3450	0.90	10	12	5	2	5*5	2
DP-IL0520(A&B)3500	3400~3600	3500	0.90	13	12	5	2	5*5	2
DP-IL0520(A&B)3625	3550~3700	3625	0.90	13	12	5	2	5*5	2
DP-IL0520(A&B)3700	3600~3800	3700	0.90	13	12	5	2	5*5	2


4*4mm



5*5mm



7*7mm



アスニクス株式会社

<https://www.asnics.com/index.html>

[本社] TEL : 045-470-6515 FAX : 045-470-6518
 [大阪営業所] TEL : 06-6195-2111 FAX : 06-6195-2155

データシートやサンプル請求等、
ご要望がございましたら、お気軽にご連絡ください。

<https://www.asnics.com/contact/inquiry.html>



アスニクス株式会社

<https://www.asnics.com/index.html>

[本社] TEL : 045-470-6515 FAX : 045-470-6518
[大阪営業所] TEL : 06-6195-2111 FAX : 06-6195-2155